





uPVC Air-con Trunking | uPVC Corrugated Flexible Pipe  
uPVC Conduit Pipe | uPVC Drainage Pipe

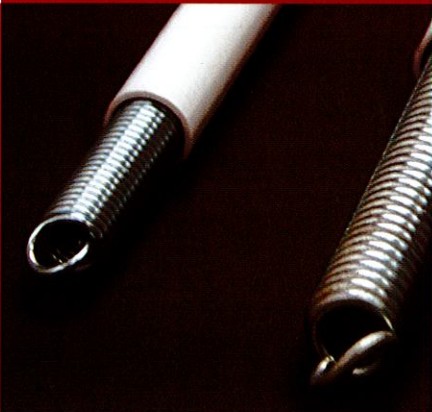

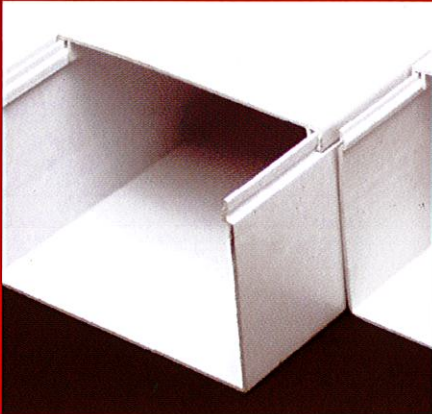

## **We'll meet your expectations.**

Active Plastics is committed to supply quality and reliable plastic products at competitive price in Singapore. Along with our wide range of trunking products, we have over 34 years experience in the plastics manufacturing business.

Starting with a modest strength in Singapore, we seek to expand our company rapidly to meet the growing Singapore plastics industry. With our technical expertise, we strive to engage in latest technology to meet customer's needs for quality products at competitive price.

Quality is imperative and the company operates a high specification in-house testing programme, ensuring all products are fully compliant with Singapore Standard SS 275 : 1999 and related standards. Our aim is to satisfy all of our customers' requirements and we are often able to offer specially designed products to meet diverse needs. To provide you with a first class service, all Active Plastics products are available from stock for immediate delivery.

Let Active Plastics show you what sets us apart.








# uPVC Air-con Trunking



Active's Air-con Trunking offers an unbeatable range of Air-Conditioning Trunkings that comply strictly to the Singapore Standard SS 275 : 1999. It is designed to provide heat and chemical resistance, high impact and combustion strength, and corrosive free. Manufactured from durable uPVC, our Trunkings are widely accepted and specified by both consulting engineers and electrical contractors for their inherent safety, strength and durability. Thanks to on-going and wide-ranging consultation with our customers, we manufacture all our product ranges with the aim to make installation easier.

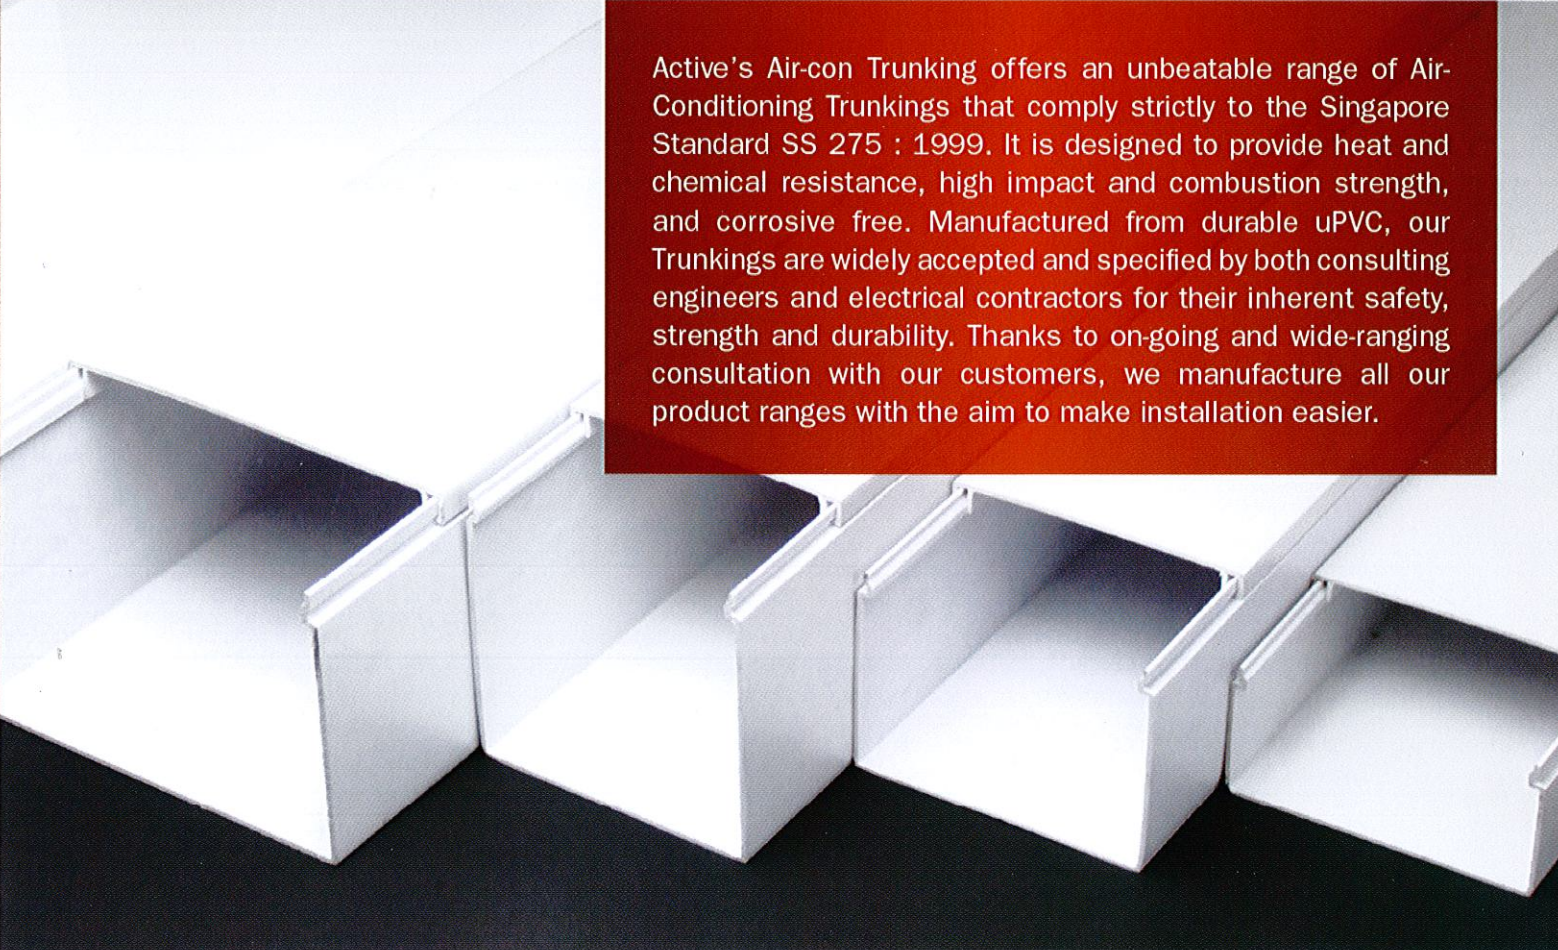





# uPVC Cable Trunking

| Code No                          | Width x Height | Standard Pack<br>in Pieces |
|----------------------------------|----------------|----------------------------|
| AT9901                           | 32mm x 13mm    | 50                         |
| AT9906                           | 23mm x 12mm    | 50                         |
| AT9906S<br>(with sticker)        | 23mm x 12mm    | 50                         |
| AT9907                           | 40mm x 20mm    | 20                         |
| AT9907DC<br>(double compartment) | 40mm x 20mm    | 20                         |
| AT9908*                          | 16mm x 16mm    | 50                         |
| AT9909*                          | 16mm x 25mm    | 25                         |
| AT9910*                          | 16mm x 38mm    | 20                         |
| AT9911*                          | 25mm x 25mm    | 20                         |
| AT9912*                          | 25mm x 38mm    | 20                         |
| AT9913DC<br>(double compartment) | 60mm x 20mm    | 20                         |
| AT9921                           | 55mm x 32mm    | 10                         |
| AT99215                          | 50mm x 40mm    | 10                         |
| AT9922                           | 55mm x 55mm    | 10                         |
| AT9932                           | 75mm x 50mm    | 10                         |
| AT99325                          | 75mm x 60mm    | 10                         |
| AT9933                           | 75mm x 75mm    | 10                         |
| AT9942                           | 100mm x 50mm   | 10                         |
| AT99425                          | 100mm x 60mm   | 10                         |
| AT9943                           | 100mm x 75mm   | 6                          |
| AT9944                           | 100mm x 100mm  | 6                          |
| AT9963                           | 150mm x 75mm   | 4                          |
| AT9964                           | 150mm x 100mm  | 2                          |
| AT9984                           | 200mm x 100mm  | 2                          |

Standard Length: 2 meter, 2.9 meter, 6 feet and 8 feet.  
Other lengths are also available.





# uPVC Corrugated Flexible Pipe



Active's Corrugated Flexible Pipe is manufactured to comply with IEC 61386-22 : 2002. It is an ideal replacement to conduit pipes.

Our Corrugated Pipes are designed to provide excellent flexibility, high rigidity, good electrical characteristics, heat and chemical resistance, high impact and combustion strength, lightweight and corrosive free. These characteristics render various operations, like transportation, handling and laying even at considerable depths, easy and fast installation.

Pack in clear film wrapping, our pipes are supplied in coils of continuous lengths to enable easy handling and to minimize use of fittings. Sizes are available in a complete range with outside diameter from 16 mm to 50 mm in three standard colours of black, white and grey.





# uPVC Corrugated Flexible Pipe


| Code No | Outer Diameter | Standard Coil |
|---------|----------------|---------------|
| AFP16   | 16mm           | 50m           |
| AFP20   | 20mm           | 50m           |
| AFP25   | 25mm           | 50m           |
| AFP32   | 32mm           | 25m           |
| AFP40   | 40mm           | 25m           |
| AFP50   | 50mm           | 25m           |

Colour available: Black, White and Grey






# uPVC Conduit Pipe

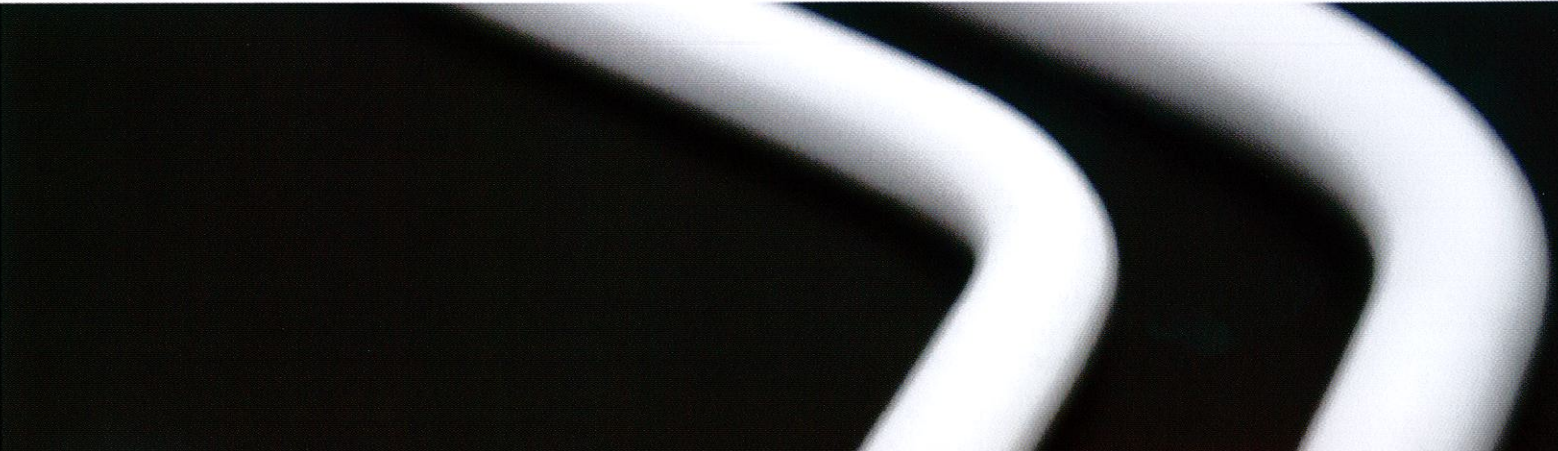

Active's Conduit Pipe is designed to protect and carry electrical cable wiring systems and other telecommunication cables in a wide range of buried, underground and surface installations. It is tough, safe and provides time saving installation.

Our Pipes are produced from durable uPVC to comply with the British Standard BS EN 61386-21 : 2004.

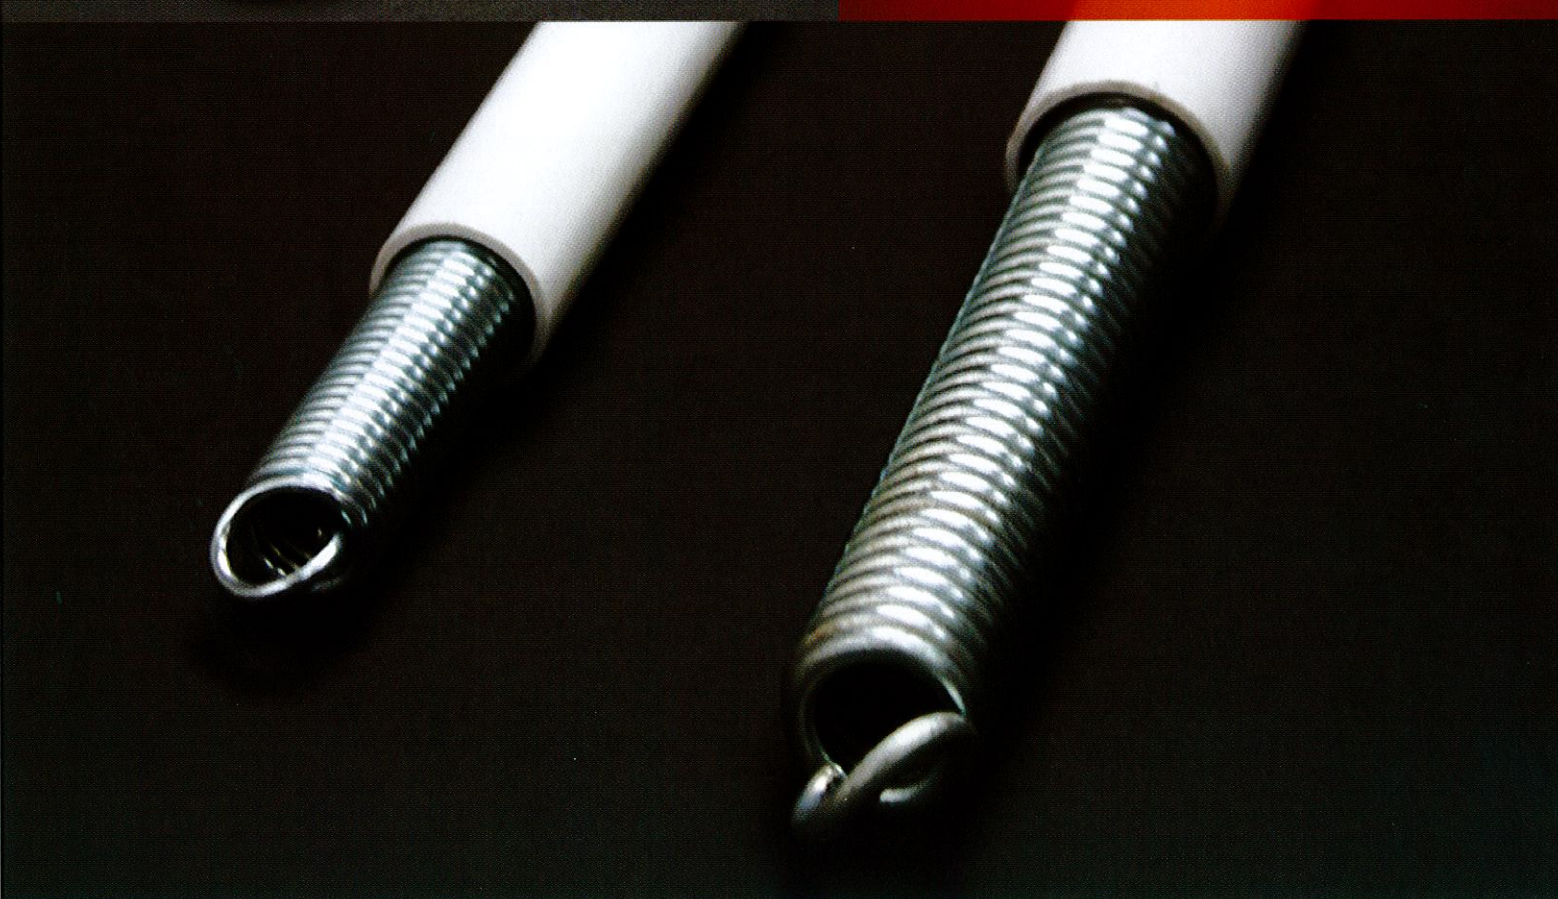





# uPVC Conduit Pipe

## FEATURES

### Ease of Installation

uPVC conduit pipes are 1/4 to 1/5 the weight of metallic systems, can be installed in less than half the time, and are easily fabricated on the job.

### Safety

uPVC conduit pipes are non-conductive, assuring a safe system.

### Impact Resistant

uPVC conduit pipes are resistant to sunlight and are recommended for exposed or outdoor usage.

### Corrosion Resistant

uPVC conduit pipes are nonmetallic and will not rust or corrode.

### Cold Bending

uPVC conduit pipes are flexible and can easily form a 90° angle with the aid of a bending spring.

### Cost Effective

uPVC conduit pipes are less expensive compared to steel pipes. Further savings on labour cost can also be generated due to a faster installation time.

| Code No | Outer Diameter | Wall Thickness (Heavy Gauge) | Standard Pack in Pieces |
|---------|----------------|------------------------------|-------------------------|
| AP20    | 20mm           | 1.8mm                        | 50                      |
| AP25    | 25mm           | 1.9mm                        | 20                      |
| AP32    | 32mm           | 2.2mm                        | 10                      |

Standard Length: 2.9 meter  
Colour available: Black and White  
Wall Thickness Tolerance:  $\pm 0.1$ mm





# uPVC Drainage Pipe

Active's Drainage Pipe is manufactured from high impact uPVC, strictly in accordance to the Japanese Standard JIS K 6741 : 1999. They are physically tough, lightweight, non-ageing and self-extinguishing.

uPVC Drainage Pipes are recognized for their advantages to efficiently serve the drainage system of air-conditioning water discharge, which are extremely corrosive. The smooth bore of the pipe prevents interior build-up and provides outstanding flow characteristics too.

| Code No | Norminal Size | Outer Diameter | Wall Thickness (Class AE) | Standard Pack in Pieces |
|---------|---------------|----------------|---------------------------|-------------------------|
| AGP13   | 13mm          | 18mm           | 1.8mm                     | 50                      |
| AGP16   | 16mm          | 22mm           | 1.8mm                     | 20                      |
| AGP20   | 20mm          | 26mm           | 1.8mm                     | 20                      |
| AGP25   | 25mm          | 32mm           | 1.8mm                     | 10                      |
| AGP30   | 30mm          | 38mm           | 1.8mm                     | 10                      |
| AGP40   | 40mm          | 48mm           | 1.8mm                     | 10                      |
| AGP50   | 50mm          | 60mm           | 1.8mm                     | 10                      |

Standard Length: 2.9 meter  
Colour available: Grey





uPVC Air-con Trunking | uPVC Corrugated Flexible Pipe  
uPVC Conduit Pipe | uPVC Drainage Pipe

Authorised Dealer



**SINGDUCT (S) PTE LTD**

Blk 20 Ang Mo Kio Industrial Park 2A  
AMK Techlink #03-27 Singapore 567761  
Tel: (65) 6383 3018 Fax: (65) 6383 1038  
Email: [sales@singduct.com.sg](mailto:sales@singduct.com.sg)